


Seville Lectern System

Portable Lectern Sound System Specifications

Advancing Technology

The Seville lectern brings an air of strength and integrity to any presentation. With its built-in sound system and rich oak finish, the Seville is at home on stage, in an elegant hotel or in the university auditorium. The wireless model allows the presenter to use a projector or white board with a hands free microphone.

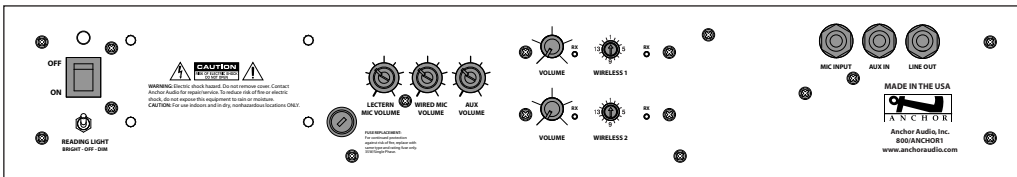

(LP-7500U2 Control Panel Shown)



SEVILLE MODELS

- LP-7500** Lectern w/ sound system
- LP-7500U1** Lectern w/ sound system w/ built-in UHF wireless receiver
- LP-7500U2** Lectern w/ sound system w/ two built-in UHF wireless receivers

UHF WIRELESS

- WH-6000** Wireless Handheld mic/ transmitter
- WB-6000** Wireless body-pack transmitter w/ handsfree microphone. Handsfree microphone options include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

6-YEAR WARRANTY!

REACH CROWDS OF 750+

POWERFUL 70-WATT BUILT-IN SOUND SYSTEM

SENSITIVE 18" GOOSENECK ELECTRET MICROPHONE FOR CLEAR VOICE PROJECTION

SHOCK-ABSORBING MICROPHONE MOUNT

LINE OUTPUT JACK FOR RECORDING PRESENTATIONS

ONE OR TWO BUILT-IN WIRELESS RECEIVERS

TREBLE & BASS LEVEL ADJUSTMENTS

MIC OUTPUT JACK FOR CONNECTING TO A MIXER OR INSTALLED SOUND SYSTEM

TWO UNIVERSAL INPUT JACKS: 1/4" PHONE & XLR

6-1/2" WOOFER COUPLED W/ EXTENDED-RANGE HORN TWEETER PROVIDE NATURAL VOICE PROJECTION

DUAL-INTENSITY READING LIGHT

LINE-LEVEL OUTPUT FOR RECORDING

DELUXE MODEL HAS RICH, GOLDEN OAK SURFACES & SOLID OAK TRIM

TILT-N-ROLL CASTERS FOR QUICK & EASY TRANSPORT

MADE IN THE USA!

SEVILLE ACCESSORIES

- LM-618** 24" gooseneck microphone
- LC-650** Padded nylon slipcover
- UHF-6400** UHF 64 channel wireless microphone set w/ choice of wireless handheld mic/transmitter or wireless body-pack transmitter w/ handsfree microphone. Handsfree microphone options include: Over-the-Ear/EM-60, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

SEVILLE TECHNICAL SPECIFICATIONS

Rated Power Output	70W continuous
Max SPL @ Rated Power	107 dB @ 1 meter
Frequency Response	65 Hz - 15 KHz
AC Power Reqs.	110 - 125 Volts AC, 50/60 Hz 210 - 240 Volts AC, 50/60 Hz (40 VA nominal, 120 VA max)
Speaker Type	6.5 inch woofer, high-output tweeter
Dimensions (HWD)	49 x 24 x 21" / 125 x 61 x 53 cm
Weight	122 pounds / 55 Kg



Inputs	
Lectern Mic	Lo-Z, balanced, phantom power, XLR
Auxiliary Mic	Lo-Z, balanced, phantom power, XLR
Line	Hi-Z, unbalanced, 1/4"-phone
Sensitivity For Rated Output	
Microphone	-52 dBV (2.5 mVrms)
Line	-14 dBV (200 mVrms)
Outputs	
Mic (post fader)	Lo-Z, transformer balanced, XLR
Line (post fader)	buffer isolated, 1/4" phone
Speaker	70W @ 4ohm, switched, 1/4" phone

(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



Anchor Audio, Inc.
Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com