


Seville Lectern System

Technical Specifications



SIX YEAR WARRANTY

The Seville lectern brings an air of strength and integrity to any presentation. With its built-in sound system and rich oak finish, the Seville is at home on stage, in an elegant hotel or in the university auditorium. The wireless model allows the presenter to use a projector or white board with a hands free microphone.

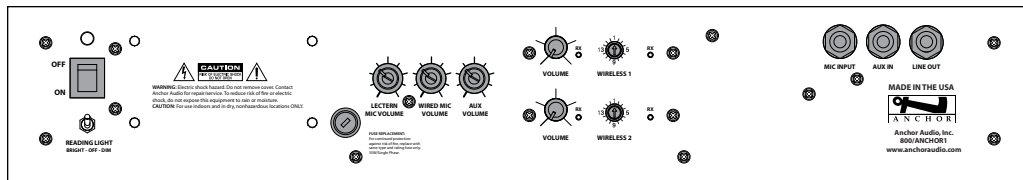

(LP-7500U2 Control Panel Shown)

Features

- Reach Crowds of 750+
- 107 dB of Clear Sound
- 22W Amplifier and High Efficiency speaker
- Sensitive 24" Gooseneck Electret Microphone for Clear Voice Projection
- Shock-Absorbing Microphone Mount
- Line Output Jack for Recording Presentations
- One or Two Built-in Wireless Receivers
- Input Jack: 1/4"
- Dual-Intensity Reading Light
- Line-Level Output For Recording
- Bass and Treble Controls
- Deluxe Model has Rich, Golden Oak Surfaces & Solid Oak Trim
- Tilt-N-Roll Casters for Quick & Easy Transport



SEVILLE MODELS

- LP-7500** Lectern with sound system
- LP-7500U1** Lectern with sound system with built-in UHF wireless receiver
- LP-7500U2** Lectern with sound system with two built-in UHF wireless receivers

UHF WIRELESS

- WH-6000** Wireless handheld microphone transmitter
- WB-6000** Wireless body-pack transmitter (requires handsfree microphone)
Handsfree microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

ACCESSORIES

- LM-618** 24" gooseneck microphone
- LC-650** Padded nylon slipcover
- UHF-6400** UHF 64 channel wireless microphone set with choice of wireless handheld mic/transmitter or wireless body-pack transmitter with handsfree microphone. Handsfree microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-60

TECHNICAL SPECIFICATIONS

Rated Power Output	22 Watts continuous	Inputs	
Max SPL @ Rated Power	107 dB @ 1 meter	Lectern Microphone	Lo-Z, balanced, phantom power, XLR
Frequency Response	65 Hz - 15 KHz	Auxiliary Microphone	Lo-Z, unbalanced, 1/4"-phone
AC Power Reqs.	110 - 125 V AC, 50/60 Hz 210 - 240 V AC, 50/60 Hz (40 VA nominal, 120 VA max)	Aux	Hi-Z, unbalanced, 1/4"-phone
Speaker Type	6.5" woofer, high-output tweeter	Sensitivity For Rated Output	
Dimensions (HWD)	49" x 24" x 21" (125 x 61 x 53 cm)	Microphone	-52 dBV (2.5 mVrms)
Weight	122 lbs/ 55 Kg	Line	-14 dBV (200 mVrms)
		Outputs	
		Line (post fader)	buffer isolated, 1/4" phone



(Features & Specifications Subject to Change Without Notice)



Anchor Audio, Inc.
Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com

S-S/0910