



PROLINK

Wireless Intercom System

Perfect for...

- House of Worship
- College Production
- Broadcast Studios
- Event Coordination
- Football Coaches
- Theaters
- Musicals
- and more!




TECH SPECS

- Two channels with four users per channel
- Push to Talk or Always On modes
- Heavy duty 4-pin XLR connector for headsets
- Microphone gain adjustment knob
- Out of range LED indicator
- Rechargeable AA batteries included

FEATURES

- 500 ft. line of sight wireless communication
- A/B channel selection
- Unlimited number of listen only units
- Choice of single, dual muff, or lightweight headset
- Batteries operate 10 - 12 hours on a single charge
- FCC license free

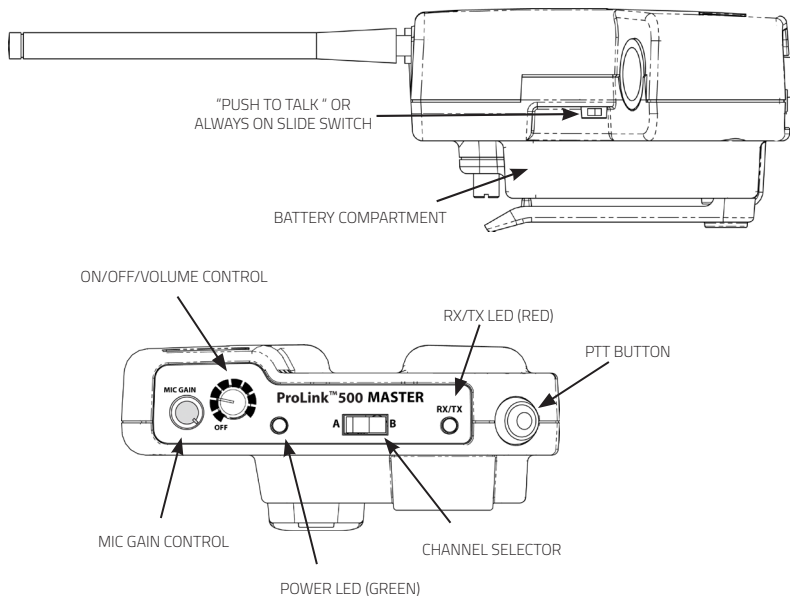

| ProLink 500 Packages | |
|----------------------|----------------------------------------------------------------------------------------------------------------|
| PRO-540 | Includes one BP-500M, three BP-500R, choice of four headsets, one GC-500, and a sturdy cardboard carrying case |
| PRO-570 | Includes two BP-500M, five BP-500R, choice of seven headsets, two GC-500, and a sturdy cardboard carrying case |
| System Components | |
| BP-500M | ProLink master belt pack |
| BP-500R | ProLink remote belt pack (1, 2, 3) |
| BP-500L | ProLink listen only belt pack |
| H-2000 | Intercom headset - dual muff |
| H-2000S | Intercom headset - single muff |
| H-2000LT | Intercom headset - lightweight |
| GC-500 | Gang charger for four belt packs |
| HC-ARMOR24-PL | Anchor Armor hard case - ProLink 500 |

| Technical Specifications | | |
|---------------------------------------------------------|--------------------------------------------------------------------------------|--|
| BP-500 - ProLink Belt Pack | | |
| Frequency Range | 902 - 928 MHz | |
| Modulation | FSK | |
| Wireless Range | Duplex 500' (152.4 m) line of sight | |
| Antenna | 1/2 - wavelength dipole | |
| Headset Connector | 4-pin XLR male | |
| Power Supply | 9VDC, 1.2ADC | |
| Battery Life | 10 - 12 hours | |
| Dimensions (HWD) | 4" x 3.5" x 2" (10.2 x 8.9 x 5.1 cm) | |
| Weight | 1 lb / .5 kg (with batteries) | |
| Warranty | 2 years | |
| H-2000/H-2000S - Dual Muff / Single Muff Headset | | |
| Drivers | Dynamic, 40 mm | |
| Impedance | 300 ± 15% | |
| Frequency Response | 20 Hz - 20 KHz | |
| SPL | 91 dB ± 3 dB | |
| Rated Power | > 40mW | |
| Distortion | < 5% | |
| Microphone | Dynamic, uni-directional, low impedance | |
| Microphone Sensitivity | Referenced to 0 dB = 1V/μbar, 1kHz Min -85 dB / Typical -83 dB / Max -81 dB | |
| Frequency Response | 200 Hz - 12 Hz | |
| Connector | 4-pin XLR female | |
| Weight | Dual: 1 lb / 0.5 Kg Single: 0.8 lb / 0.4 Kg | |
| Warranty | 2 years | |



(Features & Specifications Subject to Change Without Notice)