



AN-130+

Speaker Monitor



Perfect for...

- Conference Rooms
- Presentations & Meetings
- Classrooms
- Trade Show Booths
- AV Carts
- Lecture Halls
- Board Rooms
- Install & Integration Projects
- City Council Meetings
- and more!




TECH SPECS

- 103 dB of clear sound
- 30W AC mode
- 1.9 GHz wireless frequency
- 3.5 mm AUX & 1/4" line input
- 1/4" wired mic input
- 1/4" line output to daisy chain multiple units
- One 4.5" woofer
- One 10 mm dome tweeter

FEATURES

- Reaches crowds of 150+
- Connect up to two wireless mics
- Optional remote control
- Built-in bracket mount screws for easy installation (bracket with allen wrench sold separately)
- Available in black or white

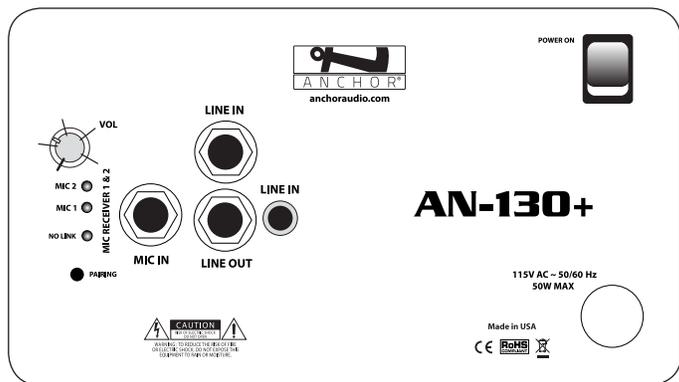

(AN-130U2+ Back Panel)

AN-130+ Models	
AN-130+	AN-130+ powered speaker monitor - white
AN-130BK+	AN-130+ powered speaker monitor - black
AN-130U2+	AN-130+ with built-in dual wireless mic receiver - white
AN-130U2BK+	AN-130+ with built-in dual wireless mic receiver - black
AN-130RC+	AN-130+ with remote control - white
AN-130RCBK+	AN-130+ with remote control - black
AN-130U2RC+	AN-130+ with built-in dual wireless mic receivers and remote control - white
AN-130U2RCBK+	AN-130+ with two built-in dual wireless mic receivers and remote control - black

Microphones

WH-LINK	Wireless handheld mic (1.9 GHz)
WB-LINK	Wireless belt pack transmitter (1.9 GHz)
HBM-LINK	Headband mic (3.5 mm plug)
CM-LINK	Collar mic (3.5 mm plug)
EM-LINK	UltraLite mic (3.5 mm plug)
LM-LINK	Lapel mic (3.5 mm plug)
MIC-90P	Wired handheld mic with 20 ft. cable (1/4" phone plug)

Accessories

SB-3W+/SB-3BK+	40° tilt bracket ceiling mount - white or black
SB-360W+/SB-360BK+	360° swivel wall mount - white or black
RM-1BK+	Single rackmount - black
RM-12BK+	Double rackmount - black
SS-250	Speaker stand for AN-100CM+, AN-130+, AN-135+ and AN-1000X+
CC-100	Carrying bag for AN-100CM+, AN-130+, AN-135+ and AN-1000X+
CC-100XL	Extra large carrying bag AN-100CM+, AN-130+, AN-135+ and AN-1000X+
HC-ARMOR24-AN	Anchor Armor rolling hard case - AN series
REMOTE-130	Infrared remote control (AN-130RC+ only)

Technical Specifications

Rated Power Output	30 watts AC mode
Max SPL @ Rated Power	103 dB @ 1 meter
Frequency Response	65 Hz - 18 kHz ± 3 dB
Microphone Wireless Frequency	1.9 GHz DECT
Microphone Wireless Range	150'+ line of sight
Line Inputs	Hi-Z, unbalanced, 1/4" phone, 3.5 mm
Microphone Input	Lo-Z, unbalanced, 1/4" phone
Line Output	Lo-Z, buffered, 1/4" phone
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Requirements	110 - 125 VAC, 50/60 Hz 50W max
Export Model Power Requirements	208 - 240 VAC, 50/60 Hz 50W max
Fuse Rating	T 1.0A / 250V (internally mounted)
Export Model Fuse Rating	T 0.5A / 250v (internally mounted)
Dimensions (HWD)	9" x 8.5" x 5.5" (23 x 22 x 14 cm)
Weight	6 lbs / 2.7 Kg
Warranty	6 years

Sensitivity for Rated Output

Line	-20 dBV (100 mVms)
Microphone	-43 dBv (7.5 mVms)



(Features & Specifications Subject to Change Without Notice)