

Explorer PRO Sound System

MADE IN USA



SIX YEAR WARRANTY

Technical Specifications

The next generation Explorer PRO is perfect for sound projection in an indoor or outdoor settings and playing music during school activities. The unit delivers 110dB of intelligible speech from one sound system designed for users with no technical knowledge.

Featuring quick set up and easy to use controls, the new Explorer PRO is truly versatile with true AC/DC operation and improved battery life. The system is ideal for schools, corporate trainers and places of worship.




ACCESSORIES

MIC-90	Professional dynamic, cardioid pattern handheld microphone
SS-550	Heavy-duty speaker stand
CC-550	Soft case for two SS-550 speaker stands
NL-EXP	Nylon storage cover
HC-ARMOR24-EXP	Anchor Armor hard case-Explorer
SOFT-EXP	Nylon case with rollers & handle for speaker, stand & accessories
MP3-TOTE	Holds MP3 player and Mic
MSB-201	Microphone stand

UHF WIRELESS

WH-6000	Wireless handheld microphone/transmitter
WB-6000	Wireless body-pack transmitter (requires handsfree microphone) Microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

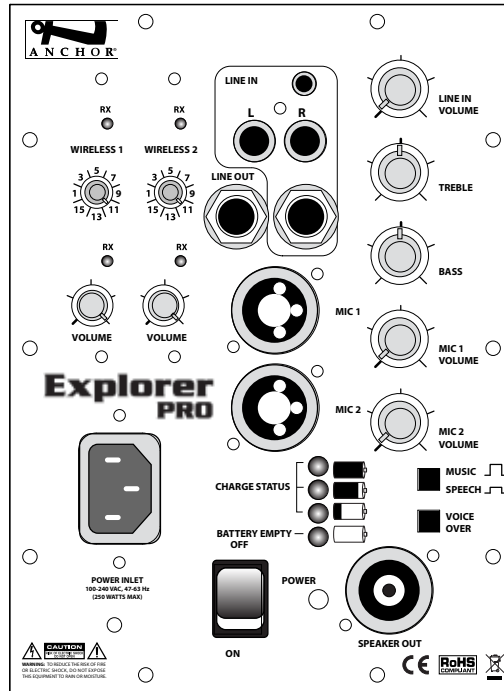

(EXP-7500U2 Back Panel Shown)

EXPLORER MODELS AC Only

EXP-7500AC	AC powered sound system
EXP-7500U1AC	One built-in wireless receiver
EXP-7500U2AC	Two built-in wireless receivers

EXPLORER MODELS AC/DC

EXP-7500	AC/DC powered sound system
EXP-7500U1	One built-in wireless receiver
EXP-7500U2	Two built-in wireless receivers
EXP-7501	Unpowered companion speaker

TECHNICAL SPECIFICATIONS

Rated Power Output	75 watts AC/DC mode	Inputs	
Max SPL @ Rated Power	110 dB @ 1 meter	Microphone (Two combo)	Lo-Z (1 K Ω), balanced, XLR 12 VDC condenser microphone phantom power
Frequency Response	80 Hz - 16 kHz		Hi-Z (10 K Ω), unbal, 1/4" phone
AC Power Reqs.	90 - 264 VAC, 50/60 Hz	Auxiliary (line)	Hi-Z (10 K Ω), unbal, 1/8" & 1/4"
Dimensions (HWD)	17" x 10.5" x 9.5" (43 x 27 x 24 cm)	Sensitivity For Rated Output	
Weight (AC/DC)	23 lbs/ 10.4 Kg	Line	-8.4 dBV (380 mVrms)
Weight (AC only)	16 lbs/ 7.25 Kg	Mic (unbal & bal)	-49 dBV (3.63 mVrms)
		Outputs	
		Line (post fader)	Lo-Z, buffered, 1/4" unbalanced/ balanced
		Speaker	4-pole Neutrik Speakon [®] jack

(Features & Specifications Subject to Change Without Notice)

800.262.4671

Anchor Audio, Inc.
Portable Sound Systems • Carlsbad, California

www.anchoraudio.com

S-E/1210

